


OneTouch AT G2/10G Controller (Master) -> Remote (End Point) LinkRunner AT Reflector:

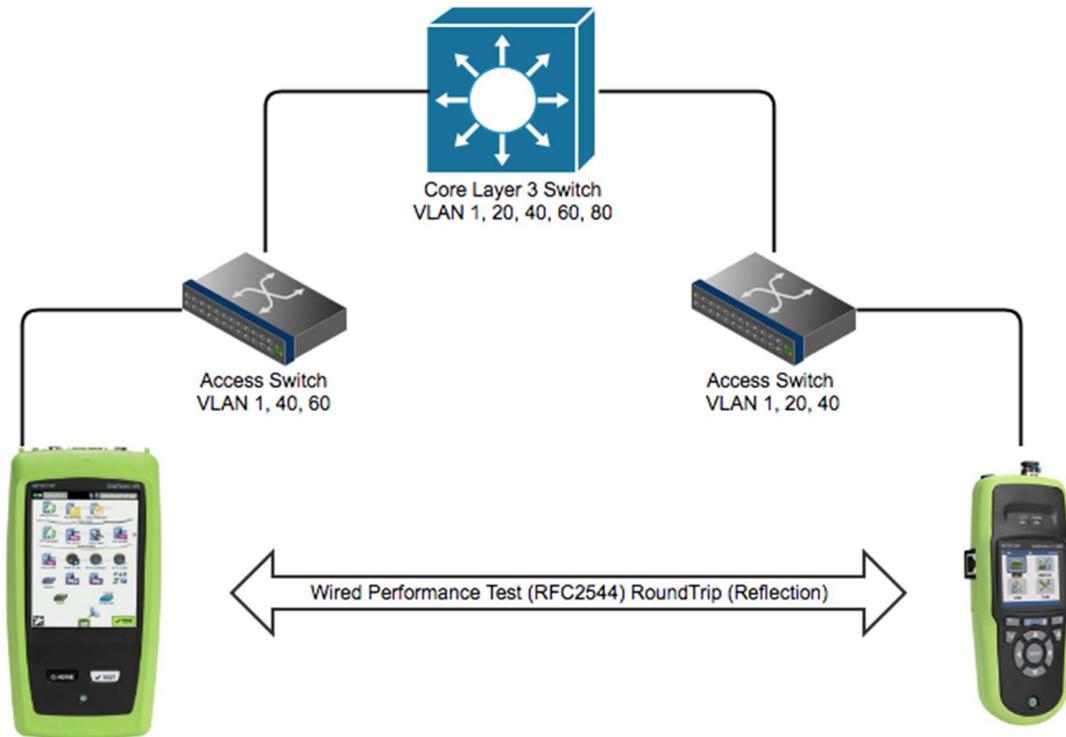


LinkRunner AT 2000 Reflector Remote (End Point) Configuration:

To Configure the LinkRunner AT as a Reflector perform the following steps.


1. Using the arrow keys navigate to the Tools Menu and Press Select



2. Using the up/down arrow key navigate to the Reflector Menu Item and Press Select

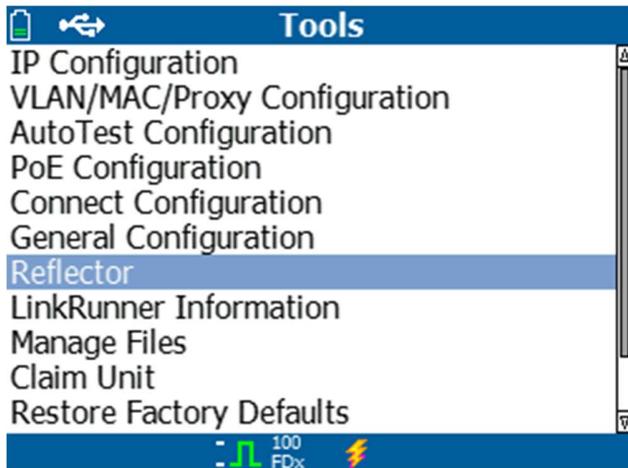


3. Press F1 for “configure.” Ensure Packet Type is MAC + NETALLY and Swap is MAC + IP. And Press F2 Save

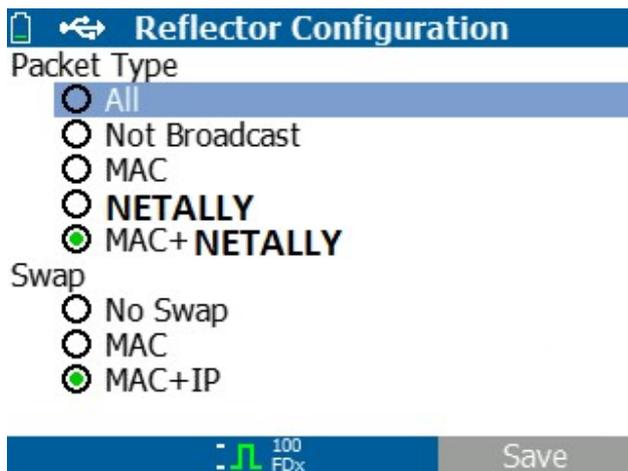

4. Wait for the LinkRunner AT to acquire an IP Address via the DHCP Server and Press Start

Reflector		Reflector	
IP Address:	Acquiring IP..	IP Address:	010.000.001.113
MAC Address:	00-C0-17-B6-99-99	MAC Address:	00-C0-17-B6-99-99
Packet Type:	MAC+ NETALLY	Packet Type:	MAC+ NETALLY
Swap:	MAC+IP	Swap:	MAC+IP

Reflector Mode



Reflector Mode




Configure	Configure	Start
-----------	-----------	-------

5. Press F2 for Start

Reflector	
IP Address:	010.000.001.113
MAC Address:	00-C0-17-B6-99-99
Packet Type:	MAC+ NETALLY
Swap:	MAC+IP

Reflector Mode



Configure	Stop
-----------	------

NOTE: Take note of the IP Address as you will need it to configure the Controller (Master) device.